

Gerber Technology LLC.

TEST REPORT


SCOPE OF WORK
UL 94 Flammability Test: V-0

REPORT NUMBER
105451529BOX-001

ISSUE DATE
30-May-2023

PAGES
5

DOCUMENT CONTROL NUMBER
GFT-OP-10h (6-march-2017)
© 2023 INTERTEK

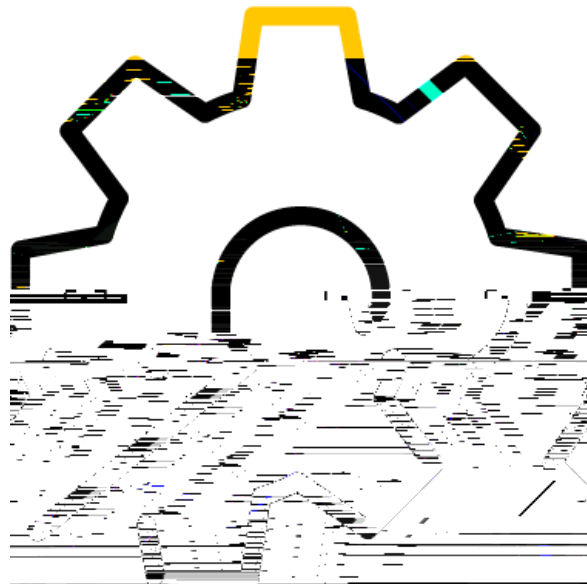

TEST REPORT

EQUIPMENT LIST:

TEST EQUIPMENT LIST					
Item	Equipment Type	Make	Model No.	Serial No.	Next Cal. Due
1	Small Temperature/Humidity Chamber	Bryant Manufacturing	TH-5S	1207	Verified
2	Needle Flame Burner Apparatus	ED&D	NFB-01	SAF254	Verified

TEST REPORT

TEST REPORT

Attachment 2: Data Table

Preconditioned 9.1.1 of IEC 60695-11-10: Five bar test specimens shall be conditioned for a minimum of 48 h at 23 °C ± 2 °C and 50 % ± 5 % relative humidity. Once removed from the conditioning chamber, the test specimens shall be tested within 1 h

Sample Number:	1	2	3	4	5	
Afterflame T1 (sec)	4	0	3	0	10	Total Afterflame (tr
Afterflan T2 (sec)		3		0	0	
Afterglc T3 (sec)		0	0	0	0	
Burn to hol		N	Y	N	N	